


Polyester Holographic Thermal Lamination Film



Key Features

- Polyester base offers advanced surface properties
- Offers good dimensional stability during one-side or both side lamination jobs
- Low melt co-polymer ensures high bond strength at lower lamination temperatures
- Common applications - Photo Album, Leaflets, posters, menu cards, carton boxes
- Excellent Holographic effect.

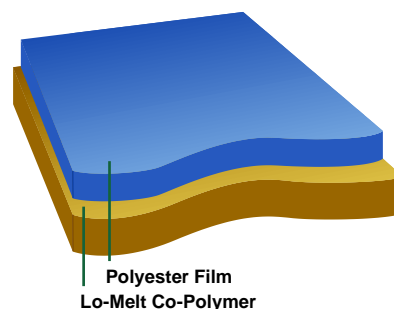

Physical Characteristics

Properties	Unit	Test Method	Polyester
Thickness (Structure)	Mil		1.1 (.5/.6)
	Micron		27 (12/15)
GSM	gm/m ²	Surya Polyfilms	30.96
Yield	m ² /Kg	Surya Polyfilms	32.3
Lamination Temperature		Surya Polyfilms	110° ~ 130°C (230° ~ 260°F)
Corona Treatment Coating Side	Dyne	ASTM D-2578	>44
Substrate Side			<38
Coefficient of Friction Polyester / Polyester	-	ASTM D-1894	0.60 / 0.40
Polyester / Coating			1.44 / 0.40
Coating / Coating			1.43 / 0.70
Gloss	60°	ASTM D-2457	110
Surface Finish			Gloss

Standard Roll Sizes

Core Size		26mm (1")	58mm (2.25")	77mm (3")
		✓	✓	✓
Width	inch			9 ~ 27
	mm		12 / 18 / 25 / 27 305 / 458 / 635 / 686	225 ~ 686
Length	ft		250 / 500 / 750	3000 / 6000 / 10,000
	m		75 / 150 / 225	1000 / 2000 / 3000